

preserve vision

OptoSLT M

preserve vision OptoSLT M

Selective Laser Trabeculoplasty (SLT) is an advanced, non-invasive primary or secondary treatment of increased intraocular pressure. It employs short pulses of specific wavelength that selectively target the melanin-containing cells in the trabecular meshwork while preserving the adjacent non-pigmented eye structures. Lowenergy laser irradiation evokes cytokines response what consequently activates the macrophages which clear the damaged cells. Increased trabecular meshwork porosity restores balanced aqueous outflow and lowers the intraocular pressure.

UNRIVALED **SLT** LASER SYSTEM

The OptoSLT M is a staple of glaucoma treatment for every doctor's practice. Compact design, 33 energy levels in the range of 0.2 to 2,6 mJ, a red aiming beam allowing precise focusing of the treatment beam, and built-in safety features ensure quick, safe and effective office-based SLT treatment.

e-SlitLight™ HIGH POWER LED ILLUMINATION SYSTEM

Tired of replacing slit lamp bulb? Want to have a brighter light? The e-SlitLight™ LED slit lamp offers thousands of hours of bright white light originating from the solid state LED light source. The LED illumination enhances color, detail and contrast and therefore significantly improves imaging. Additionally, its minimal heat emission makes the treatment comfortable even for dry eye patients.






FES™ - Fine Energy Setting FOR UNMATCHED PRECISION

Advanced technical solutions and sophisticated electronics incorporated into the OptoSLT M allow for a precise adjustment of energy in order to match the specific needs of the therapy or the patient. The fine energy setting buttons are conveniently located just next to the joystick, offering the physician easy and accurate adaptation of energy to the patient's eye response.



PPS™ - **Pulse to Pulse Stability** FOR ADVANCED SAFETY

Optotek has spent extra time and effort to ensure highest reliability and safety of the system. The OptoSLT M incorporates a PPS[™] technology for delivering stable output energy far exceeding current industry standards. Enhanced accuracy and stability of energy provide the highest degree of safety and assure effective and efficient eye treatments.

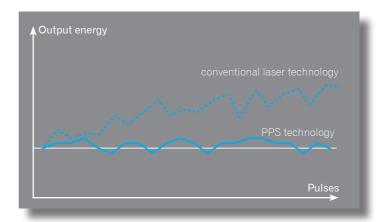

Treatment at 3 Hz FOR HIGHER PERFORMANCE

OptoSLT

4

OPTOT

The OptoSLT M with newly designed laser cavity and optimized system configuration features repetition rate at 3 Hz. Faster treatment shifts physician's productivity and patient's comfort to a completely new level.

Easy-to-move System

Convenient portable design allows ophthalmologists to change location with ease. Having electronics box underneath the table, the system can be moved freely to another worktop and therefore instantly ready for use.

preserve vision OptoSLT M

TECHNICAL SPECIFICATIONS

LASER	
Laser Source	Q switched, frequency doubled Nd:YAG
Wavelength	532 nm
Energy	0,2 to 2,6 mJ per pulse in 33 steps
Spot Size	400 µm
Cone Angle	< 3°
Pulse Rate	Up to 3 Hz
Burst Mode	Single pulse
Pulse Duration	4 ns (typical)
Aiming Beam	Red diode; 650 nm; continuously adjustable intensity (635, 670 nm optionally)
Laser Trigger	Joystick (footswitch optionally)
Cooling System	Air convection
SLIT LAMP	
Туре	e-SlitLight™
Illumination Source	White LED
Magnification	10x, 16x, 25x (6x, 10x, 16x, 25x, 40x optionally)
TABLE	
Туре	Central mounted
Dimensions	600 x 480 mm
SYSTEM DIMENSIONS	
SLT Laser Head Dimensions	240 x 150 x 60 mm
Total System Height	695 – 730 mm
WEIGHT	
Total Net Weight	21 kg
ELECTRICAL REQUIREMENTS	
Power Supply	100 - 240 V, 50 - 60 Hz, 1,1 A MAX
ACCESSORIES	
Optional Accessories	Motorized lifting mechanism, Footswitch, Elbow support, Beam splitter with co-observation tube, Warning light, Magnification changer (5x)

Specifications are subject to change without notice.





With many years of experience in ophthalmic lasers, Optotek has a clear vision of its mission – to deliver the innovative tools and solutions to the ophthalmologists worldwide. Designing and manufacturing User-friendly, Safe, Effective, and Reliable products is a key element of Opototek's corporate philosophy.

OPTOTEK d.o.o. Tehnološki park 21, 1000 Ljubljana, Slovenia T: +386 1 620 46 00, F: +386 1 620 46 01, E: optotek@optotek.si